

TRIPOD TURNSTILE

BASTION - M

Bastion-M is one leg base tripod turnstile gate. Enlarged housing allows getting extra strength and robust benefits which are enough to keep pedestrian traffics of high intensity.



ROBUST TRIPOD TURNSTILE WITH STYLISH DESIGN

 **60**
pers / min
FREE ACCESS
(for each pass)

 **25**
pers / min
CROSSING CAPACITY
(for each pass)

 **600**
mm
MAX. PASSAGE WIDTH
(one side)

 **41-54***
PROTECTIVE LEVEL

 **DROP-ARM**

 **MOTORIZED**

 **BI-DIRECTIONAL**

Advantages

- Bi-directional servodrive tripod turnstile with panic / bar drop-arm function
- High quality at a cost effective price
- Integration with any type of access control and ID systems
- Low power consumption
- Panic / bar drop-arm function with automatic reset
- Whisper quiet, low noise operation
- Optional indoor or outdoor housing types
- Wide range of accessories
- Availability of a backup battery connection
- Complete supply set as a standard

Standard

- 4 LED indicators
- Wired remote control
- Supply of backup battery power connection
- Anti-panic function with automatic reset

Options

- Any additional devices upon request (e.g. passage counter, RFID/Proximity/BioMetric readers, coin acceptor, push button, barcode and QR-code reader)
- Heating function for external installation (for cold climates)
- Cooling system
- Tripod Twin modification is available

* first figure is standard, all other available upon request.



www.tiso.global
+380 (44) 291-21-11
e-mail: sales@tiso.global



Technical Specifications:

Unit width, mm	815
Unit length, mm	793
Unit height, mm	1000
Mechanism	Servo-driven (Triservo-M)

Controlled by:



access control system;



push button control unit

Electrical Specifications:




- Voltage:
 - from the AC (100-240)V, 50/60Hz;
 - from a DC source 12 V;
- Maximum power consumption 55W per pass;

Ambient temperature range:

- Standard +1°C to +40°C, up to IP41
- Optional -20°C to +55°C, up to IP54

Materials:

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316 Polished SS AISI 304 Polished SS AISI 316 Powder coated RAL
Tripod hub	Cast aluminum with grey painted finishing

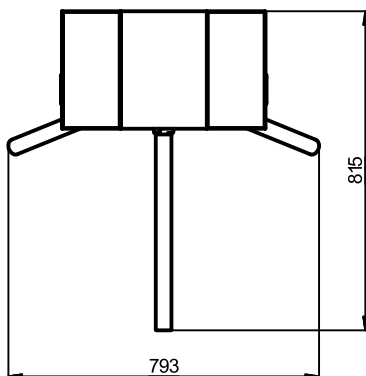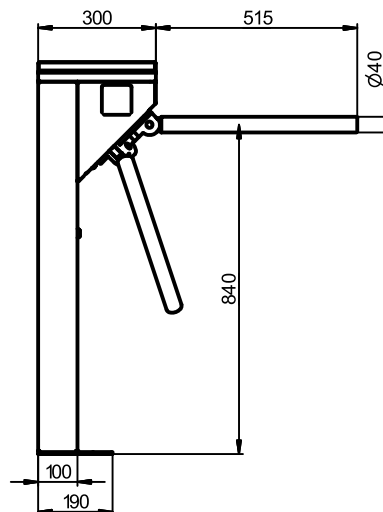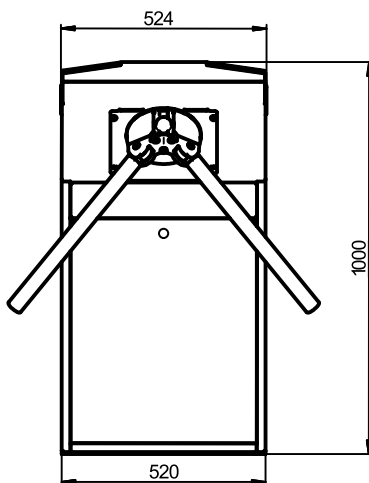

Installation areas:

- Governmental institutions
- Military bases
- Nuclear power plants
- Production sites (industrial plants)
- Commercial areas
- Financial institutions
- Airport premises
- Business (office) centers
- Hotels
- Sport complexes
- Recreation areas
- Urban areas
- Education institutions and others

